

## Blacklight BL368 Linear T5

F15W T5 BL368  
0000090



### Product features

- Blacklight BL368 T5 UV-A lamp with spectral peak at 368nm



## PRODUCT OVERVIEW

|                            |                      |
|----------------------------|----------------------|
| Product name               | F15W T5 BL368        |
| Technology                 | Special applications |
| Lamp shape                 | Tubular shape        |
| Type                       | T5                   |
| Cap/Base                   | G5                   |
| Lamp finish                | Frosted/Coated       |
| Fixture rating             | Enclosed             |
| General application        | SPG                  |
| ETIM Class                 | EC002962             |
| E-number FI                | 4940423              |
| Light colour               | BL368 Blacklight     |
| Wattage (W)                | 15.00                |
| Product Voltage (V)        | 44                   |
| Dimmable                   | No                   |
| Average life (Nominal) (h) | 10000                |
| Product EAN number         | 5410288000909        |
| Dimming method             | N/A                  |

## DATA TABLE

### General data

|                                  |                      |
|----------------------------------|----------------------|
| Product name                     | F15W T5 BL368        |
| Technology                       | Special applications |
| Lamp shape                       | Tubular shape        |
| Type                             | T5                   |
| Cap/Base                         | G5                   |
| Lamp finish                      | Frosted/Coated       |
| Fixture rating                   | Enclosed             |
| General application              | SPG                  |
| Operating temperature range (°C) | -15°C - 50°C         |
| ETIM Class                       | EC002962             |
| E-number FI                      | 4940423              |

## Blacklight BL368 Linear T5

F15W T5 BL368

0000090

### Optical data

|                         |                  |
|-------------------------|------------------|
| Light colour            | BL368 Blacklight |
| Adjustable chromaticity | N                |

### Electrical data

|                       |          |
|-----------------------|----------|
| Wattage (W)           | 15.00    |
| Current (A)           | 0.310    |
| Mains voltage (V)     | 230-240V |
| Product Voltage (V)   | 44       |
| Control gear required | Yes      |
| Transformer required  | No       |
| Dimmable              | No       |
| Drive current (mA)    | 310      |

### Lifetime data

|                            |       |
|----------------------------|-------|
| Average life (Nominal) (h) | 10000 |
|----------------------------|-------|

### Physical data

|                                     |             |
|-------------------------------------|-------------|
| Nominal Product Length (mm)         | 300.0       |
| Nominal Product Diameter (mm)       | 16          |
| Max. Length base to base (mm) - A   | 288.3       |
| Length base to pin Min-Max (mm) - B | 293.0-295.4 |
| Max. Lamp Length (mm) - C/L         | 302.5       |
| Max. Lamp Diameter (mm) - D         | 17.0        |
| Weight (kg)                         | 0.023       |

### Packaging


|                                       |                |
|---------------------------------------|----------------|
| Single packaging type                 | Carton         |
| Product EAN number                    | 5410288000909  |
| Packaging single length / height (cm) | 30.3           |
| Packaging single width (cm)           | 1.9            |
| Packaging single depth (cm)           | 1.9            |
| DUN14 (outer)                         | 15410288000906 |
| Units per outer package               | 25             |
| Packaging outer length / height (cm)  | 32.0           |
| Packaging outer width (cm)            | 11.0           |
| Packaging outer depth (cm)            | 10.5           |

### Safety data

|                                            |                                |
|--------------------------------------------|--------------------------------|
| Lamp mercury content (mg)                  | 2.30                           |
| Optimal operating condition (°C)           | -15-50                         |
| Breakage cleaning instructions             | Applicable                     |
| Recommendation for disposal at end of life | Applicable                     |
| Special purpose lamp                       | Yes                            |
| Intended purpose                           | Flykilling - Insect attraction |
| Suitable for household illumination        | No                             |
| Safety message                             | Not suitable for household     |

**Blacklight BL368 Linear T5**  
*F15W T5 BL368*  
**0000090**

**PHOTOMETRY**

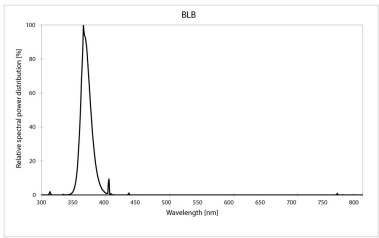

**TECHNICAL DRAWINGS**

